

COMPUTER CONTROLLED CODE MACHINES

ITL 9700

The Industrial Code Machine

- Recirculating bearings
- Superior rigidity and repeatable accu.
- Supplied with carbide cutter
- 3 year parts and labor warranty (cutter not included)
- Communication port
- Over 600 depths and spaces built in
- 99 custom tables for new depths and spaces
- Compatible with majority of commercially available software
- Typical cut rates:

Laser mode	8 seconds
High Speed	9 seconds
Standard mode	15 seconds
Bi-Axial 6 pin	16 seconds



ITL9700

w/Carbide Cutter

11,590⁰⁰

ITL9700A


w/Carbide Cutter
& Auto Rotate Head

12,790⁰⁰

ITL 9000

Industry Leader Since 1985

- Super bearing construction
- Repeatable accuracy (+/-) .001"
- Communication port
- Over 600 manufacturers' depths & spaces built in
- 99 custom tables for new depths & spaces
- 1 year parts and labor warranty (cutter not included)
- Cuts standard, Keymark® and Bi-Axial Medeco™
- One cutter emulates all flat widths

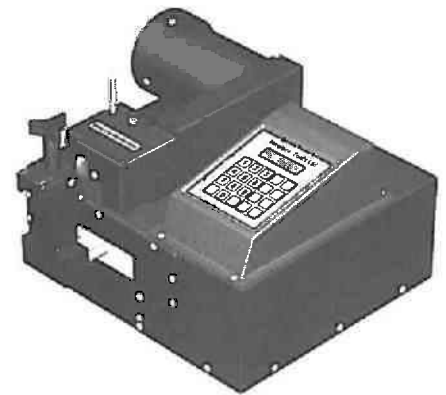

ITL9000

9,590⁰⁰

ITL9000CA

w/carbide cutter

10,060⁰⁰

ITL 950

The Most Cost Effective Code Machine Ever

- Both 12 volt and 120 volt usage
- Repeatable accuracy (+/-) .002"
- Communication port
- Over 600 manufacturers' depths and spaces built in
- 99 custom tables for new depths and spaces
- 1 year parts and labor warranty (cutter not included)
- One cutter does all (w/minor exceptions)



ITL 950C

Preloaded with automotive Codes

- Keymark® ready
- Normal mode - Laser cut mode - Half cut mode
- Medeco/Emhart™ head and program included
- Inserts for double-sided automotive keys
- Magnetic insert caddy

ITL950M

6,190⁰⁰

ITL950MCA

w/carbide cutter

6,660⁰⁰

IT950CM

6,790⁰⁰

ITL950CMCA


w/carbide cutter

7,260⁰⁰

ITL SIDEWINDER

Superb Features and Performance at an Affordable Price

- Universal Jaw for North American High Security Keys
- Built-in Stops for Four Different Length of Keys
- Half-cut Mode for Progression
- LED Indicator for Height Calibration
- Built-in Codes
- Communication Port
- 1 Year Parts and Labor Warranty (Cutter not included)
- Repeatable Accuracy +/- .0015"
- 120VAC/12VDC

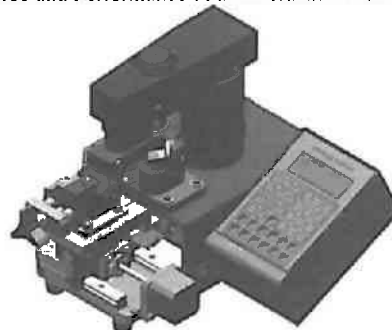

Weight: 30 lbs.

ITLSIDEWINDER

8,990⁰⁰