


CONSTRUCTION LOCK

- No Damage to Doors or Frames
- No More Chains Through Sheet Rock Routine
- Re-usable Temporary Locks That Effectively Secure Both In-Swing and Out-Swing Doors
- Provide Effective Protection by Preventing Theft and Keeping Losses Down
- Mount to ASA, T-Strike, Full-Lip, Flush Bolt and Deadlock Strike Preparations
- Comes With Mounting Holes and Screws. No Strike Preparation is Required
- Can Be Installed in 15 Seconds

In search of a temporary construction lock that is affordable and easy to install? The Larry Lock is your answer. Attach to a metal door frame with a minimum 2" face, close your 1 3/4" thick door, apply a padlock and walk away knowing that the Larry Lock has done the job. Remember, all screws are hidden when the door is closed.

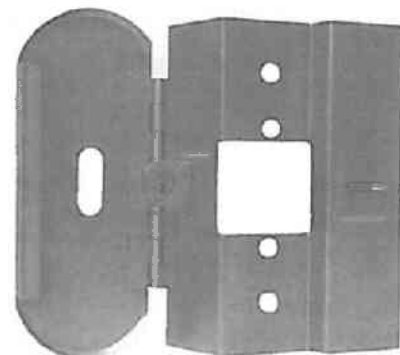

LLLARRYLOCK
48⁰⁰

Limited Lifetime Warranty
 Manufactured in the USA




4040XP

THE MOST DURABLE HEAVY DUTY CLOSER DESIGNED FOR THE MOST DEMANDING, HIGH USE AND ABUSE APPLICATIONS

- NEW 4040XP closer shipped with EDA arm, standard plastic cover, and self reaming and tapping screws.
- Non-sized cylinder is adjustable for interior doors to 5'0" and exterior doors to 4'0".
- Closer mounts parallel arm (EDA arm) on either right or left swinging doors.
- Optional hinge side and top jamb mount with optional regular arm.
- Closers to meet ADA requirements.
- Standard or optional custom powder coat finish.
- Optional plated finish on metal cover, arm and fasteners.
- Optional SRI primer for installations in corrosive conditions is available with powder coat only.
- Optional designer series metal cover
- UL and cUL listed for self-closing doors without hold-open.
- 4040XP can be used with all 4041 accessories.
- All Weather Fluid
- Non-Handed
- LCN®Fast™ Power Adjust
- Fast & Accurate Installation
- UL & cUL Listed
- Tested and certified under ANSI Standard A 156.4, grade one

- 44% increased bearing load capacity
- Strongest pinion ever- at 3/4" journal diameter
- Widest bearing ever- at 5/8"
- Stronger pinion teeth
- New V-shield™ seal with 20% longer life
- XP = eXtra Protection in real world applications
- Cast Iron
- Forged Steel Arm
- Double Heat Treated Steel Pinion



REGULAR ARM

373⁰⁰ ea.

Code	Exterior or Vestibule Doors	Interior Doors	Finish
LC4040XP-ALUM	2'0" - 4'0"	2'0" - 5'0"	Aluminum
LC4040XP-DR/BRZ	2'0" - 4'0"	2'0" - 5'0"	Dark Bronze

HOLD-OPEN ARM

412⁰⁰ ea.

Code	Exterior or Vestibule Doors	Interior Doors	Finish
LC4040XPH-ALUM	2'0" - 4'0"	2'0" - 5'0"	Aluminum
LC4040XPH-DR/BRZ	2'0" - 4'0"	2'0" - 5'0"	Dark Bronze