




• EXIT DEVICE • TRIM

19 SERIES PUSH BAR EXIT DEVICES

The Monarch 19-R Series rim device that delivers superior panic hardware with modern touchbar styling. This non-handed device covers a 161 cutout and may be used on 1 3/4" narrow stile aluminum doors. The "EO" (Exit Only) device is ready to accept all appropriate trim functions.

- Hand:** Non-Handed.
- Functions:** All functions built into "EO" device. All 19 Series trim works with rim or vertical devices
- Finishes:** Powder-coated aluminum-SP28; powder-coated duranodK-SP313; stainless steel US-320.
- Strikes:** F570 standard, 565, 571/571A, F490 optional
- Latchbolt:** Stainless steel, 3;" throw.
- Deadlocking latchbolt:** Standard
- Dogging Feature:** 1/2 turn hex dogging standard. No threaded parts to wear out
- Cylinder Dogging:** Specify "CD" prefix. Use 1 -," long mortise cylinder with standard "A:" cam.
- Stock Sizes:** 3'0" and 4'0"
- Doors:** 1 3/4" thick, wood or metal. Specify thickness if other than 1 3/4".
- Narrow Stile Doors:** Specify 565 strike.
- Projection:** 2 1/2" maximum; 1 7/8" dogged.
- Electric Function:** Can be interfaced with building security system. Security monitoring, electric dogging, exit indicator, and exit alarm available.
- Fasteners:** All mounting screws are concealed. Furnished with sheet metal screws. Machine screws available, specify AMS.
- Sex Bolts:** 3-#4122 (1/4-20) SNB standard.
- ANSI:** Certified ANSI A156.3-2001 Grade 1 standards
- Shim Kit:** For glass lite applications; 1/4" thick specify SK 19-R- 1/4".
- 161 Cutout:** Device covers 161 cutout with KIK/KIL and Centron trims. Other trim requires cover plate

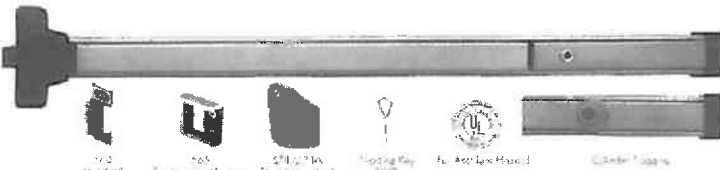

3' **313⁰⁰**
3' 6" **384⁰⁰**

Code	Finish	For
MN19-R-EO-3'-SP28	Aluminum	Short Doors 29"-36"
MN19-R-EO-3'-SP313	Dark Bronze	Short Doors 29"-36"
MN19-R-EO-4'-SP28	Aluminum	Long Doors 35"-48"
MN19-R-EO-4'-SP313	Dark Bronze	Long Doors 35"-48"

19 SERIES PUSH BAR VERTICAL ROD EXIT DEVICES

Manufactured to the same exacting standards as the 19 Rim, the 19-V Exit Device complies with most exit door requirements, and is fully reversible and surface applied. This device is regularly furnished with deadlocking top latch with latch retention and square bolt at bottom. The "EO" (Exit Only) device is ready to accept all appropriate trim functions.

- Hand:** Field reversible.
- Functions:** All functions built into "EO" device. All 19 Series trim works with rim or vertical devices.
- Finishes:** Powder-coated aluminum-SP28; powder-coated duranodic-SP313;
- Strikes:** 3788 strike is surface applied standard. 2130 strike is mortised into floor. Allows use of standard 3788 strike
- Latchbolt:** Top stainless steel 3/4" throw. Bottom square bolt 1/2" throw.
- Deadlocking Latchbolt:** Standard
- Dogging Feature:** 1/2 turn hex dogging standard. No threaded parts to wear out.
- Cylinder Dogging:** Specify "CD" prefix. Use 1 1/8" long mortise cylinder with standard 'A' cam.



3' **475⁰⁰**
3' 6" **546⁰⁰**


- Stock Sizes:** 3'0" and 4'0"
- Doors:** 1 3/4" thick, wood or metal Specify thickness if other than 1 3/4".
- Narrow Stile Doors:** To 1 3/4" N.S aluminum. With contol trim- 2 1/4" min. stile.
- Projection:** 2 1/2" max., 1 7/8" dogged
- Electric Function:** Can be interfaced with building security systems. Security monitoring, electric dogging, exit indicator, and exit alarm available
- Fasteners:** All mounting screws are concealed. Furnished with sheet metal screws. Machine screws available, specify AMS
- Sex Bolts:** 3-#4122 (1/4-20) SNB standard Hollow core wood, light gauge Hollow Metal, etc. require additional sex bolts. 19-V-6-#2729 #10-24 SNB; 19-V-LBR: 3-#2729 #10-24 SNB
- ANSI:** Certified ANSI A156.3 2001 Grade 1 standards.
- 19-V:** Latch retention and 3788 strike top, deadbolt and 2130 flush strike bottom.
- 19-V-LBR:** 3788 strike top.
- Vertical Rods:** Furnished to length based on 40 5/16" horizontal CL from finished floor and a 7'0" door standard. Variations from these standards must be specified when ordering.
- Shim Kit:** For glass lite applications; 1/4" thick specify SK-19-V-1/4".
- 161 Cutout:** Device covers 161 cutout with KIK/KIL and Centron trims. Other trim requires cover plate.

Code	Finish	For
MN19-V-EO-3'-SP313	Dark Bronze	Short Doors 29"-36"
MN19-V-EO-3'-SP28	Painted Aluminum	Short Doors 29"-36"
MN19-V-EO-4'-SP313	Dark Bronze	Long Doors 35"-48"
MN19-V-EO-4'-SP28	Painted Aluminum	Long Doors 35"-48"

TRIM FOR 19 SERIES EXIT DEVICES(Discount -C)

L-Control - 170.00 Specify: BE(Blank Esc), NL(Nightlatch), DT(Dummy Trim), Plain(Key Locks or Unlocks)

K-Control

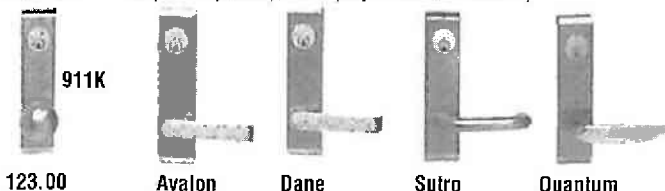

911K 123.00 Avalon Dane Sutro Quantum

TP-Control



910TP Thumb Piece 123.00

DT-Control



910DT Dummy Trim 123.00

NL-Control



910NL Nightlatch 123.00

KIK 32D

KIL 32D



205.00