

**NYLON BRUSH PERIMETER GASKETING**  
 Stocked in sets:  
 36" x 84" and 72" x 84".

**NGA626A-36** 53.38  
**NGA626A-72** 62.80

**NYLON BRUSH GASKET**  
 Stocked in 36" lengths.

**NG600A-36** 12.60

**NYLON BRUSH DOOR SWEEP**  
 Stocked in 36" and 48".

**NGC627A-36** 16.41  
**NGC627A-48** 21.88

**SURFACE AUTOMATIC DOOR BOTTOM**  
 Stocked in 36", 42" and 48" lengths. Maximum cut downs 4".

**NG420NA-36** 86.69  
**NG420NA-48** 109.19  
**NG420NA-60** 153.42

**ALUMINUM SILICONE GASKET**  
 Stocked in 36", 48" and 72" and lengths.

**NG700ES-36** 19.98  
**NG700ES-48** 26.64  
**NG700ES-72** 39.96

**EXTRUDED SILICONE GASKETING**  
 Stocked in sets:  
 36" x 84" and 72" x 84".

**NG160SA-36** 52.19  
**NG160SA-72** 61.40

**CLEAR NEOPRENE DOOR SWEEP**  
 Stocked in 36" and 48" lengths.

**NG200NA-36** 11.97  
**NG200NA-48** 15.96

**ALUMINUM SADDLE THRESHOLD**  
 Stocked in 36" lengths.

**NG428E-36** 55.83

**ALUMINUM SADDLE THRESHOLD**  
 Stocked in 36", 48" and 72" lengths.

**NG424E-36** 17.73  
**NG424E-48** 23.64  
**NG424E-72** 35.46

**ALUMINUM PANIC THRESHOLD**  
 Stocked in 36", 48" and 72" lengths.

**NG804S-36** 34.38  
**NG804S-48** 45.84  
**NG804S-72** 68.76

**ALUMINUM SADDLE THRESHOLD**  
 Stocked in 36", 48" and 72" lengths.

**NG513-36** 27.99  
**NG513-48** 37.32  
**NG513-72** 55.98

**ALUMINUM PANIC THRESHOLD**  
 Stocked in 36", 48" and 72" lengths.

**NG896S-36** 31.35  
**NG896S-48** 41.80  
**NG896S-72** 62.70

**LOW PROFILE LITE KIT**

**L-FRA100**


**Self-Attaching, Beveled Glass Frame**

**Standard Features**

- 20 ga. cold rolled steel
- Mitered and welded corners
- Welded reinforcing clips at corners
- Counter-sunk mounting screw holes
- #8 x 3/4" Phillips head SMS
- Available in uneven and fractional sizes
- For 1 3/4" doors, accepts 1/4" glass
- Standard finish - (GPZ) Gray Primer with Zinc\*
- \*Zinc adds added corrosion protection


**Positive Pressure Rated Kits Require:**

- INTUMESCENT glazing tape - either NGP9800 or 3M GIS, when 1/4" wire glass is used.
- Fire-rated glass
- Hollow metal doors require clips every 12", order as L-clips when required.

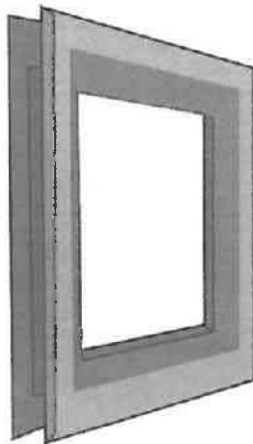

**NGL-FRA100**  
 12" x 12"  
**3900**

Other sizes available, special order.

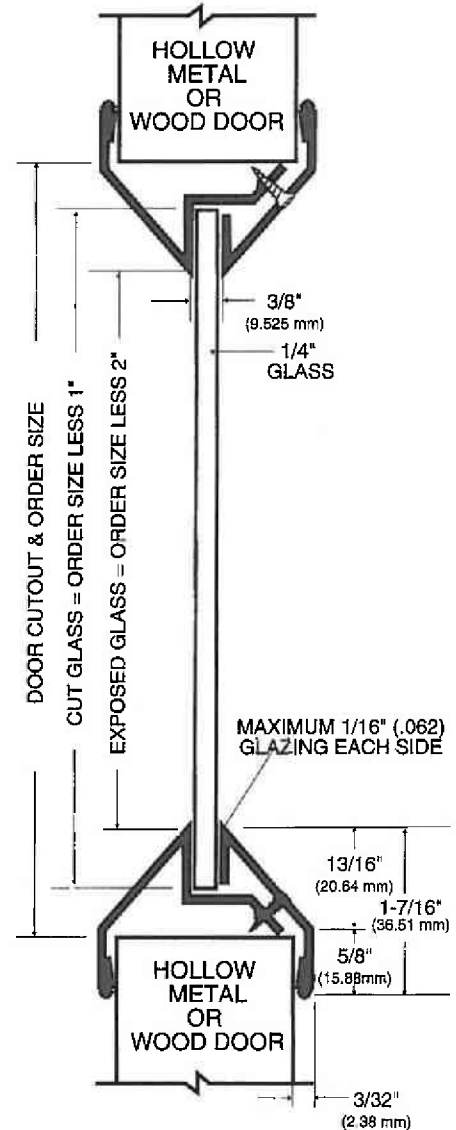

not to scale

