



### EMLOCK ELECTROMAGNETIC LOCKS

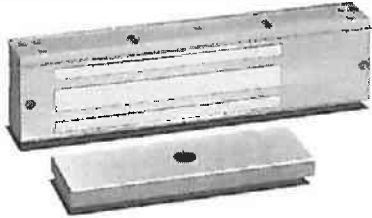

**1571 Grade 2 • 1200 lb. Holding Force • Low Power Voltage: 12/24VDC Voltage Sensing Input**  
11" x 2.75" x 1.562" **380.00**

**1511 Grade 1 • 1650 lb. Holding Force Voltage: 12/24VDC Voltage Sensing Input**  
11" x 2.75" x 1.562" **410.00**



**1581 Grade 3 • 650 lb. Holding Force Voltage: 12/24VDC Voltage Sensing Input**  
8.75" x 2.125" x 1.25" **310.00**

### REX BAR - MECHANICAL SWITCH BAR



Non-Latching Push Bar For:  
• Magnetic Lock Release  
• Delayed Egress Trigger  
• Access Control Request-to-Exit  
• Alarm Shunt  
• CCTV or Alarm Activation

**ONLY 1/8" TOTAL BAR MOVEMENT**

Standard Length - 36"


Only 1/8" movement for quick, quiet operation 1/8"



The smallest profile in the industry to provide ample clearance for egress and maintain superior aesthetics of high profile openings.

**SXMSB550V**  
Aluminum Anodized  
**210<sup>00</sup>**

### POWER SUPPLY

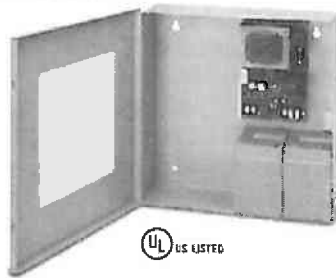


**Input:** 115VAC, 600mA, 50/60 Hz  
**Output:** 12/24VDC, 1 amp  
**Battery Charger:** 13.5/27VDC, 500mA

**Cabinet:** 11.5" x 11.5" x 3.5", 18GA

**SX602RF** Power Supply **300.00**

### PTH POWER TRANSFER HINGE

**PTH-2-4Q**  
4.5" x 4.5"

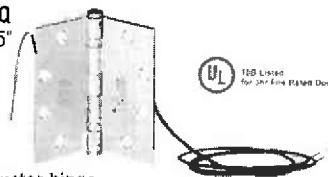

Six conductor hinge.  
28 GA. 2 pair 100 mA, 20 GA. 1 pair, 3 Amp.  
6" wire leads. Dull chrome finish. **175.00**

### REX BAR - PRESSURE SENSE BAR



Non-Latching Push Bar For:  
• Magnetic Lock Release  
• Delayed Egress Trigger  
• Access Control Request-to-Exit  
• Alarm Shunt  
• CCTV or Alarm Activation

### PRESSURE SENSE TECHNOLOGY

**Activation Force**  
**Factory Set:** 5 lbs.  
**Field Set:** Up to 15 lbs. max

**SXPSB560V**  
Aluminum Anodized  
**330<sup>00</sup>**

### SWITCHES



**702**




**423M**

**702:** Momentary SPDT. Turning the key left or right momentarily actuates the contact. 6 Amp @ 30VDC **88.00**

**423MU:** Code Compliant Manual Releasing Devices and Sensors. 423MU exit switches used together with the MD31DPIR sensor comply with manual releasing device and sensor device requirements for Access-Controlled Egress Doors.

Integrated Fixed 30 Sec. Timer. 12/24VDC. 2 amp voltage output. **130.00**

### ELECTRIFIED CYLINDRICAL LOCKSET

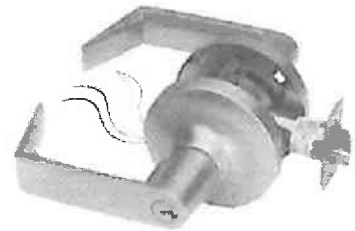

### E Eclipse

Electra™ Pro electrified cylindrical locks ensure that the door stays latched even when unlocked, maintaining fire door integrity. Electra™ Pro locksets comply with all national building and fire life safety code requirements for use on fire rated doors, including high-rise stairwell and elevator lobby doors where the use of electric strikes and magnetic locks is prohibited.

**Z7252:** Failssecure - Outside locked when de-energized. Unlocked by an access control or key from the outside and rotating the inside lever provides egress at all times.

Standard cylinder is 'C' keyway.  
Dual voltage 12/24VDC.  
Request to exit output standard.

**SXZ7252EQ**  
Satin Chrome  
**396<sup>00</sup>**